



300kVA Soundproof Generator



Features

- Noise Level @ 1m, 76dBA (@7m, 64dBA)
- Autostart DSE CP
- Motorised MCCB rated at 630A
- VELCB
- Micro Switch Protection over Buss Bar Door
- Oil Extraction Pump
- 3 Way Fuel Valve
- Battery Isolator
- Water Separator Std
- Cental Lifting Hook
- Fork Lift Pockets
- Fully Bunded
- Battery Charger

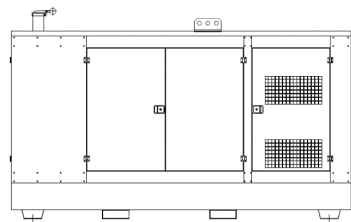

Options

- Bulk Fuel Tank



Power Solutions Nationwide

ABIRD has a policy of continuous improvement and therefore reserve the right to change the specification without prior notice.

Head Office: ABIRD Ltd. Ramsgate Road, Sandwich, Kent, CT13 9ND

Generating Set	50 Hz	60 Hz
Continuous Power	301 kVA	340 kVA
Standby Power	346 kVA	392 kVA
Noise Level @ 1m / 7m	76 dBA / 64 dBA	
Power Factor	cos φ 0.8	
Continuous Power	250 kWe	280 kWe
Standby Power	288 kWe	326 kWe
Amps 3 Phase	417 A	
Fuel consumption 70% load	46 l/h	55 l/h
Engine	1500 rpm	1800 rpm
Model	Cummins QSL9G7	
Continuous Power	268 kWm	307 kWm
Standby Power	314 kWm	356 kWm
Aspiration	Turbocharged	
Cooling System	Water	
Speed Governor	Electronic	
Cylinder Number	6	
Displacement	8,800 cm ³	
Logistic Information	GQ330CE	
Fuel Tank	450 ltr	
Weight (Wet)	4,030 kg	
Dimensions (L x W x H)	383 x 123 x 221 cm	
Control Panel	Deep Sea 7510	
Auto Start	Standard	



Deep Sea 7510 Loadshare Control Panel

